RECESSED MIXED LAMP USAGE
LAMP GROUP 3

Catalog #

Type

Project

COMBOLIGHT® MLU Series

FOUR (4) Light Recessed
Multi-Lamp Luminaire w/ .75" Trim
Group 3 - Mixed Lamp Usage
New Construction

Configure with any combination of MR16, AR70, AR111, PAR16, PAR20, PAR20MH, PAR30, PAR30MH, PAR38 or PAR38MH lamps.

DESCRIPTION:
An adjustable fixture with mixed lamp types suitable for multiple downlighting applications with one point of electrical entry. Powder coat finish on housing & lamp assembly.

CONSTRUCTION:
Housing, Plaster Frame & Trim Assembly: 18 gauge CRS. J-Box Assembly: 16 gauge CRS (galvanized). Fixture utilizes a removable trim sleeve to provide a 0.75" trim around the ceiling opening and to help conceal the inner hardware of the fixture from sight below the ceiling. Can accommodate 0.50" to 1.00" ceiling thickness.

LAMP ASSEMBLY:
Four lamps mounted in adjustable bezels. Each lamp can accept up to two optical accessories. 380º x 45º locking lamp adjustment. Provides 45º visual cut-off.

SYSTEM PROTECTION:
Thermal protection provided to guard against overheating, and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation

ELECTRICAL:
Integral Aromat® electronic metal halide ballots for metal halide lamps. Integral magnetic or electronic transformers for low voltage lamps. Fused and short circuit protection. Junction box is UL listed for through branch wiring, (access above ceiling not required) for 8 #12, 90°C supply conductors or 60°C for end of run. Ballasts/Transformers and electrical accessible through ceiling opening.

ALL RSA COMBOLIGHT PRODUCTS ARE MADE IN THE U.S.A.

Other Adders
CC - Two Circuit
CP - Chicago Plenum

Dimensions	A Overall Length	B Overall Height	C Aperture Length	D Aperture Width	E Overall Width	Ceiling Cut-Out
w/ Magnetic Transformer	57.55"	9.10"	35.00"	8.50"	10.75"	7.37" x 36.07"
w/ Electronic Transformer	52.55"	9.10"	35.00"	8.50"	10.75"	7.37" x 36.07"

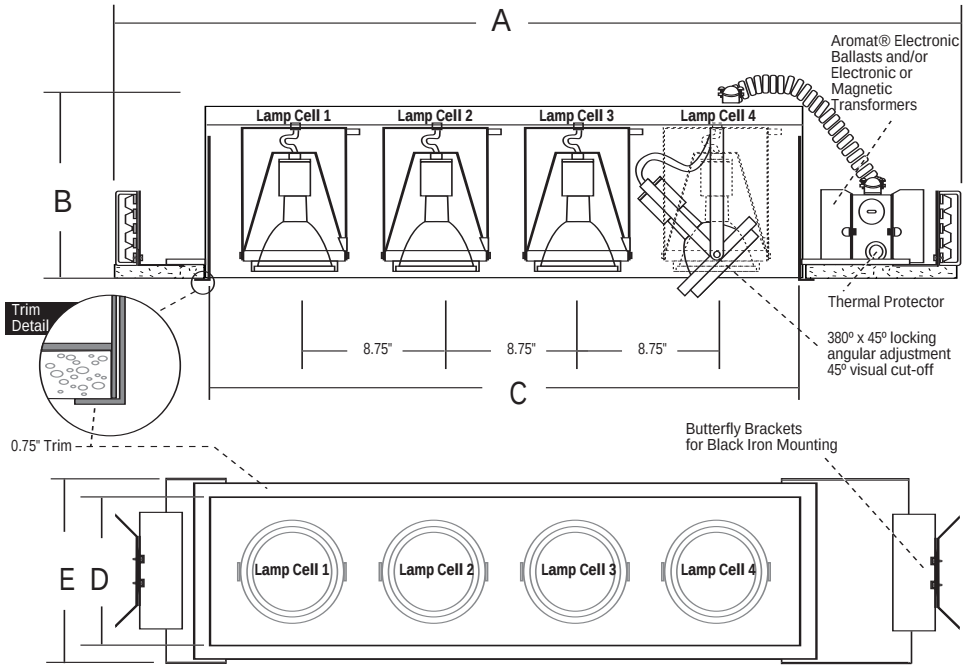

ORDERING EXAMPLE:

MLU314	*PAR38MH70*	*PAR20*	*PAR20*	*PAR38MH70*	*WH*	*BK*	*YK*	*---*	*120*

= Four Light Recessed Mixed Lamp Usage - Two PAR38MH 70W with Two PAR20 - White Trim - White Interior - Regular Yoke Lamp Holder - 120 Volt

Optional Accessories - Details on Other Side

Baffle	Snoots	Louvers	Lenses

Available Lamps			
MR1650 - MR16 12V 50W	**AR11135** - AR111 12V 35W	**PAR16** - PAR16 120V	**PAR20MH39** - PAR20MH 39W	**PAR38MH100** - PAR38MH 100W
MR1675 - MR16 12V 75W	**AR11150** - AR111 12V 50W	**PAR20** - PAR20 120V	**PAR30MH39** - PAR30MH 39W	
AR7020 - AR70 12V 20W	**AR11175** - AR111 12V 75W	**PAR30** - PAR30 120V	**PAR30MH70** - PAR30MH 70W	
AR7050 - AR70 12V 50W	**AR111100** - AR111 12V 100W	**PAR38** - PAR38 120V	**PAR38MH70** - PAR38MH 70W	

Cell 1	Cell 2	Cell 3	Cell 4
____	____	____	____

Cat. # / Description	Cell 1	Cell 2	Cell 3	Cell 4	Trim Finish	Interior Finish	Lamp Holder	Transformer	Voltage
MLU314 - 4 Light Recessed Combo w/ Mixed Lamp Usage					**BK -** Black	**BK -** Black	**YK -** Regular Yoke	**ELC -** Electronic	**120 -** 120 Volt
					WH - White	**WH -** White	**RT -** Retractable Yoke	**MAG -** Magnetic	**277 -** 277 Volt
					S - Silver	**S -** Silver	**DG -** Double Gimbal	Fo use with low voltage lamps only. Transformer types may not be mixed.	
					PT - Custom	**PT -** Custom			
					TR - Trimless				

SPECIFY -	MLU314	(see table above)	____	____	____	____	____